


KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	 SOLUTIONS, STANDARDS AND SOFTWARE www.klmtechgroup.com	Page : 1 of 111
		Rev 01
		Rev 01 Oct 2014
KLM Technology Group #03-12 Block Aronia, Jalan Sri Perkasa 2 Taman Tampoi Utama 81200 Johor Bahru Malaysia	Kolmetz Handbook Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Co Author: Reni Mutiara Sari
		Editor / Author Karl Kolmetz

KLM Technology Group has developed; 1) Process Engineering Equipment Design Guidelines, 2) Equipment Design Software, 3) Project Engineering Standards and Specifications, and 4) Unit Operations Manuals. Each has many hours of engineering development.

KLM is providing the introduction to this guideline for free on the internet. Please go to our website to order the complete document.

www.klmtechgroup.com

TABLE OF CONTENTS

INTRODUCTION	9
Scope	9
General Consideration	10
A. Aspects of Solid Mechanics	10
Statics	10
Dynamics	11
General Laws	11
B. Aspect of Fluid Mechanics	11
Fluid Statics	13
Fluid Dynamic	14

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 2 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

Types of Fluid	15
Streamlines and Stream-tube	16
The Laws of Thermodynamics	16
DEFINITIONS	18
NOMENCLATURE	19
Greek letters	21
THEORY	22
A. Solid Mechanics	22
I. Fundamental of Solid Mechanic Statics	22
Vectors	22
Characteristics of Vector	22
Statics of Rigid Bodies	25
a. Resultant of Forces Acting on a Body at the Same Point	25
b. Lami's Theorem	26
c. Resultant of Any Number of Forces Applied to a Rigid Body	
at the Same Point	27
d. Moment of The Force	28
e. Couple	30
f. Equilibrium of Rigid Bodies	31
g. Support of Rigid Bodies	32
h. Center of Gravity	34
i. Centroid of Plane Area	34

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 3 of 111
		Rev: 01
		Oct 2014

j. Centroids of Composite Areas	35
k. Moment of Inertia	37
II. Fundamental of Solid Mechanic Dynamics	43
Kinematics of Particles	43
a. Rectilinear Motion	43
b. Circular and Curvilinear Motion	46
Kinematics of a Rigid Body	50
a. Motion of a Rigid Body in a Plane	51
Dynamics of a Particle	53
a. Newton's Second Law of Motion	53
b. Principle of Work and Energy	54
c. Conservation of Energy	55
d. Principle of Impulse and momentum	55
e. Conservation of Momentum	56
f. Principle of Angular Impulse and Momentum	57
Dynamics of Rigid Bodies	59
a. Equation of Motion for the Center of Mass	59
b. Rotation about a Fixed Axis Not Through the Center of Mass	59
c. General Plane Motion	60
d. Work and Energy Methods for Rigid Bodies in Plane Motion	60
e. Impulse and Momentum of a Rigid Body	61
f. D' Alembert's Principle	62

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 4 of 111
		Rev: 01
		Oct 2014

Friction	63
a. Static and Dynamic Friction	64
b. Friction on an Inclined Plane	65
c. Rolling Friction	66
d. The Wedge	67
Vibration	67
a. Definition of Simple Harmonic Motion	68
b. Free Undamped Vibration	69
c. Forced Undamped Vibrations	70
d. Free Damped Vibration	72
e. Forced Damped Vibrations	75
B. Fluid Mechanics	76
I. Fluid Properties	76
II. Fluid statics	79
a. The Basic Equation of Fluid Statics	79
b. Pressure-Sensing Device	81
c. Hydrostatic Forces on Submerged Plane Surface	82
d. Buoyancy	85
e. Stability of Submerged and Floating Bodies	86
f. Compressible Flow	87

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 5 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

III. Fluid Dynamic	88
a. Flow rate	88
b. Law of the Conservation of Mass	89
c. Law of the Conservation of Energy	91
d. The Power of a Stream of Fluid	94
e. Principle of Thermodynamics	94
f. Conservation of Momentum	96
h. Incompressible Pipe Flow	100
1. Flow Regimes	100
2. Parameters for Pipe Flow	101
REFERENCES	108
LIST OF TABLE	
Table 1 : position of centroids of some plane geometrical	34
Table 2 : moment of inertia	42
Table 3 : values of friction coefficient for various materials	65
Table 4: summary of processes in an ideal gas	96
Table 5 : absolute roughness of pipe	103
Table 6 : equivalent length in pipe diameters (L_{eq}/D) of various valves and fittings	104
Table 7 : resistant coefficient of enlargement and contraction pipe	105

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 6 of 111
		Rev: 01
		Oct 2014

LIST OF FIGURE

Figure 1 : schematics to describe the shear stress in fluid mechanics	12
Figure 2 : deformation characteristics of substances	13
Figure 3 : pressure relation	14
Figure 4 : streamlines and stream-tube	16
Figure 5: vectors addition	22
Figure 6: triangle of forces	23
Figure 7: resultant of two forces	25
Figure 8 : Lami's theorem	26
Figure 9 : three-dimensional components of a vector R	27
Figure 10 : moment of the force	28
Figure 11 : moment of a bound vector about a point	29
Figure 12 : a couple	31
Figure 13 : a beam to determine reaction	33
Figure 14 : a bridge to determine reaction	33
Figure 15 : composite area divided into simple areas	35
Figure 16: a planar surface of area	38
Figure 17 : parallel axis based on area and mass	39
Figure 18 : polar moment of inertia	40
Figure 19 : relation between product of inertia and parallel-axis	41
Figure 20 : space-time graph	44
Figure 21 : velocity-time graph	45

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 7 of 111
		Rev: 01
		Oct 2014

Figure 22 : normal and tangential accelerations	48
Figure 23 : illustration of polar coordinates	49
Figure 24 : types of rigid body motion	50
Figure 25 : illustration for instantaneous center of rotation	52
Figure 26 : general motion of a rigid body.	52
Figure 27 : impact	56
Figure 28 : angular impulse and momentum	58
Figure 29 : rotation of a rigid body about a fixed axis	59
Figure 30 : Impulse and Momentum of a Rigid Body	61
Figure 31 : illustration of occurred friction on a block	63
Figure 32 : free-body diagram of motion up an inclined plane	65
Figure 33 : illustration of rolling friction	66
Figure 34 : free-body diagram of wedge	67
Figure 35 : Simple harmonic motion	68
Figure 36 : free undamped vibration	69
Figure 37 : forced undamped vibration	70
Figure 38 : curve of resonance	71
Figure 39 : illustration of free damped vibration	72
Figure 40 : forced damped vibration	75
Figure 41 : magnification factor in damped forced vibration	76
Figure 42 : pressure equivalence	79
Figure 43 : manometer	81

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 8 of 111
		Rev: 01
		Oct 2014

Figure 44 : notation for liquid force on submerged plane surface	82
Figure 45 : notation for liquid force on submerged curved surface	84
Figure 46 : buoyancy force diagram	85
Figure 47: Stability for a submerged body	86
Figure 48 : Stability for a floating body	87
Figure 49 : An arbitrarily shaped control volume	90
Figure 50 : continuity	91
Figure 51 : process flow diagram for conservation of energy	93
Figure 52 : P-V and T-S diagrams	94
Figure 53 : thermodynamic processes in an ideal gas	9
Figure 54 : a conduit in the x direction only	98
Figure 55 : fluid entering at point 1 and leaving at point 2.	99
Figure 56 : viscous flow around an airfoil	106
Figure 57 : drag coefficient for spheres, cylinders, and disks	107

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 9 of 111
		Rev: 01
		Oct 2014

INTRODUCTION

Scope

Solid mechanics is the study of the deformation and motion of solid materials under the action of forces, temperature changes, phase changes, and other external or internal agents. It is one of the fundamental applied engineering sciences in the sense that it is used to describe, explain and predict many of the physical phenomena.

Solid mechanics is typically useful in designing and evaluating tools, machines, and structures, ranging from wrenches to cars to spacecraft. The required educational background for these includes courses in statics, dynamics, and related subjects. For example, dynamics of rigid bodies is needed in generalizing the spectrum of service loads on a car, which is essential in defining the vehicle's deformations and long-term durability.

Fluid mechanics deals with the study of all fluids under static and dynamic situations. Fluid mechanics is a branch of continuous mechanics which deals with a relationship between forces, motions, and statistical conditions in a continuous material. This study area deals with many and diversified problems such as fluid statics, flow in enclosed bodies, or flow round bodies (solid or otherwise), flow stability, etc.

Both solid mechanics and fluid mechanics play very important roles in design. Because a fluid cannot resist deformation force, it moves, or flows under the action of the force. Its shape will change continuously as long as the force is applied. Whereas, a solid can resist a deformation force while at rest. While a force may cause some displacement, the solid does not move indefinitely.

Solid mechanics which is based on Newton laws, either in rest or motion. Solid mechanics consist of several fundamentals such as vectors, moments, couple, moment inertia, motion, vibration, and rigid bodies in statics and dynamics. Fluid mechanics consist of fluid properties and hydrostatic forces along with their application in nature.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 10 of 111
		Rev: 01
		Oct 2014

INTRODUCTION

General Consideration

A. Aspects of Solid Mechanics

The theory of solid mechanics starts with the particle, and then a rigid body. Rigid body mechanics is usually subdivided into statics and dynamics.

Statics

Statics are the study of materials at rest. The actions of all external forces acting on such materials are exactly counterbalanced and there is a zero net force effect on the material: such materials are said to be in a state of static equilibrium. Equilibrium is said to be stable when the body with the forces acting upon it returns to its original position after being displaced a very small amount from that position; and neutral when the forces retain their equilibrium when the body is in its new position.

If a body is supported by other bodies while subject to the action of forces, deformations and forces will be produced at the points of support or contact and these internal forces will be distributed throughout the body until equilibrium exists. They are equal in magnitude and opposite in direction to the forces with which the supports act on the body, known as supporting forces. The supporting forces are external forces applied to the body^[6].

A material body can be considered to consist of a very large number of particles. A rigid body is one which does not deform, in other words, the distance between the individual particles making up the rigid body remains unchanged under the action of external forces. An example of the statics of a rigid body is a bridge supporting the weight a car.

Dynamics

There are two major categories in dynamics, kinematics and kinetics. Kinematics involves the time and geometry-dependent motion of a particle, rigid body, deformable body, or a fluid without considering the forces that cause the motion. It relates position, velocity, acceleration, and time. Kinetics combines the concepts of kinematics and the forces that cause the motion.

Dynamics of a rigid body follows Newton's second law. Newton's second law of motion states that the body will accelerate in the direction of and proportional to the magnitude of the resultant R. In rectilinear motion, the acceleration and the direction of the unbalanced

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 11 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

force must be in the direction of motion. Forces must be in balance and the acceleration equal to zero in any direction other than the direction of motion. An example of the dynamics of rigid body is an accelerating and decelerating elevator.

General Laws

The fundamental concepts and principles of mechanics follow the relation between the motion and the force that is defined by Newton's Law. Newton's law states that:

1. A body remains at rest or continues in a straight line at a constant velocity unless acted upon by an external force.
2. A force applied to a body accelerates the body by an amount which is proportional to the force.
3. Every action is opposed by an equal and opposite reaction.

B. Aspect of Fluid Mechanics

Fluid mechanics is a study of the relationships between the effects of forces, energy and momentum occurring in and around a fluid system. Fluids are substances capable of following and taking the shape of containers. Fluids can be classified as liquids or gases; liquids are incompressible, occupy definite volumes, and have free surfaces; whereas, gases are compressible and expand until they occupy all portions of the container. Fluids cannot sustain shear or tangential forces when in equilibrium.

Substances may be classified by their response when at rest to the imposition of a shear force. Liquid that undergoes a shear stress between a short distance of two plates can be shown in Figure 1.

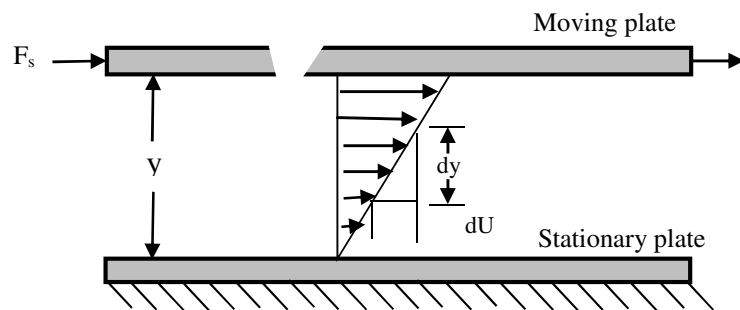


Figure 1 : schematics to describe the shear stress in fluid mechanics

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 12 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

The deformation characteristics of various substances are divided to five characteristics as illustrated in figure 2. An ideal or elastic solid will resist the shear force, and its rate of deformation will be zero regardless of loading and hence is coincident with the ordinate. A plastic will resist the shear until its yield stress is attained, and the application of additional loading will cause it to deform continuously, or flow. If the deformation rate is directly proportional to the flow, it is called an ideal plastic. Newtonian fluid is real fluids which have internal friction so that their rate of deformation is proportional to the applied shear stress. If it is not directly proportional, it is called a non-Newtonian fluid.

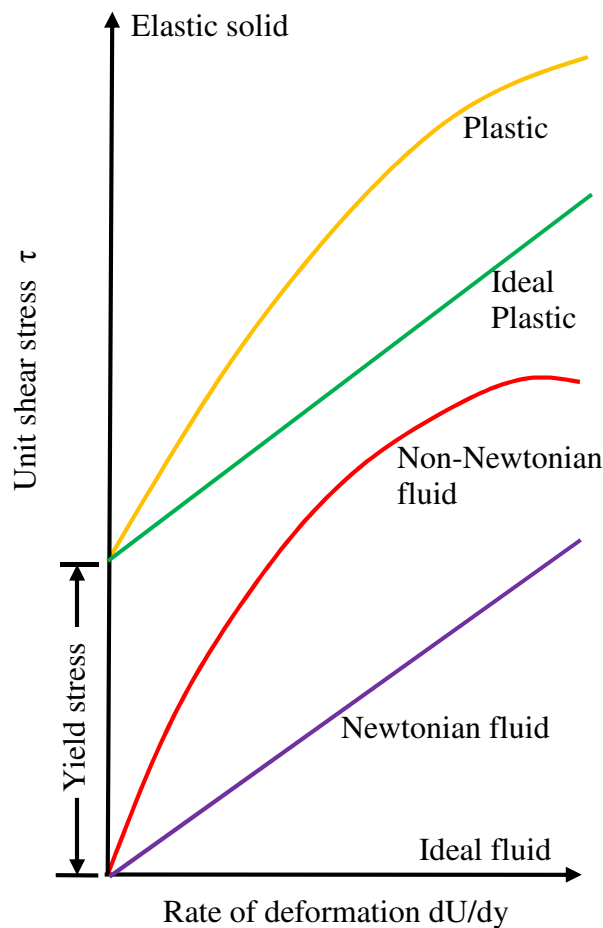


Figure 2 : deformation characteristics of substances

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 13 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

Fluid Statics

In a static fluid, an important property is the pressure in the fluid. Pressure is defined as force exerted by a mass under the influence of gravity and a mass of fluid on a supporting area, or force per area. The fluid pressure acts normal to any plane and is transmitted with equal intensity in all directions. In fluid mechanics and in thermodynamic equations, the units are lbf/ft^2 , but engineering practice is to use units of lbf/in^2 .

Most fluid-mechanics equations and all thermodynamic equations require the use of absolute pressure, and unless otherwise designated, a pressure should be understood to be absolute pressure. Common practice is to denote absolute pressure as $\text{lbf/ft}^2 \text{ abs}$, or psfa , $\text{lbf/in}^2 \text{ abs}$ or psia ; and in a like manner for gauge pressure $\text{lbf/ft}^2 \text{ g}$, $\text{lbf/in}^2 \text{ g}$, and psig . The relationship between absolute pressure, gauge pressure, and vacuum is shown in Figure 3 [6].

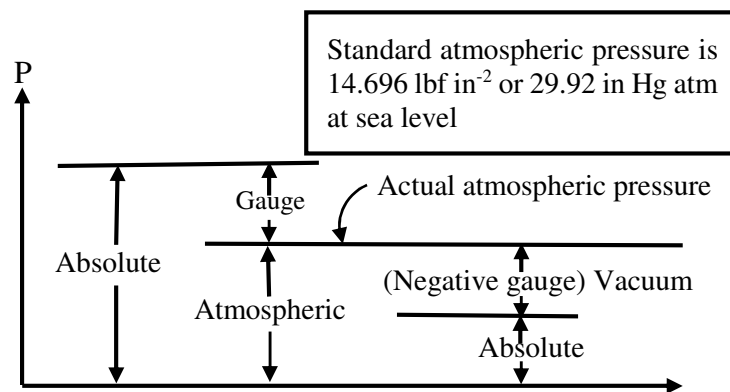


Figure 3 : pressure relation

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 14 of 111
		Rev: 01
		Oct 2014

Fluid Dynamics

Fluid dynamics is a sub-discipline of fluid mechanics that deals with fluid flow – natural science of fluid in motion. The elements of a flowing fluid can move at different velocities and can be subjected to different accelerations. The following principles apply in fluid flow:

- a. The principle of conservation of mass, from which the equation of continuity is developed.
- b. The principle of kinetic energy, from which some flow equations are derived.
- c. The principle of momentum, from which equations regarding the dynamic forces exerted by flowing fluids can be established.

Types of Fluid

Fluid flow can be characterized as steady or unsteady, uniform or non-uniform. There typically can classify any flow as follow.

1. **Steady uniform flow**
 Conditions do not change with position in the stream or with time. An example is the flow of water in a pipe of constant diameter at constant velocity.
2. **Steady non-uniform flow**
 Conditions change from point to point in the stream but do not change with time. An example is flow in a tapering pipe with constant velocity at the inlet - velocity will change as moving along the length of the pipe toward the exit.
3. **Unsteady uniform flow**
 At a given instant in time the conditions at every point are the same, but will change with time. An example is a pipe of constant diameter connected to a pump pumping at a constant rate which is then switched off.
4. **Unsteady non-uniform flow**
 Every condition of the flow may change from point to point and with time at every point. For example waves in a channel.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 15 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

In addition, there are also considered about number of dimensional required to describe the velocity profile.

1. Flow is one dimensional, if the flow parameters (such as velocity, pressure, depth etc.) at a given instant in time only vary in the direction of flow and not across the cross-section.
2. Flow is two-dimensional, if it can be assumed that the flow parameters vary in the direction of flow and in one direction at right angles to this direction. Streamlines in two-dimensional flow are curved lines on a plane and are the same on all parallel planes. The example is area.
3. All flows take place between boundaries that are three-dimensional. Typically, it takes three directions of flow such as x, y, z as a volume of fluid in a circular pipe.

Streamlines and Stream-tube

A streamline is a line which gives the direction of the velocity of a fluid particle at each point in the flow stream. When streamlines are connected by a closed curve in steady flow, they will form a boundary through which the fluid particles cannot pass. The space between the streamlines becomes a stream tube. They can be illustrated in figure 4.

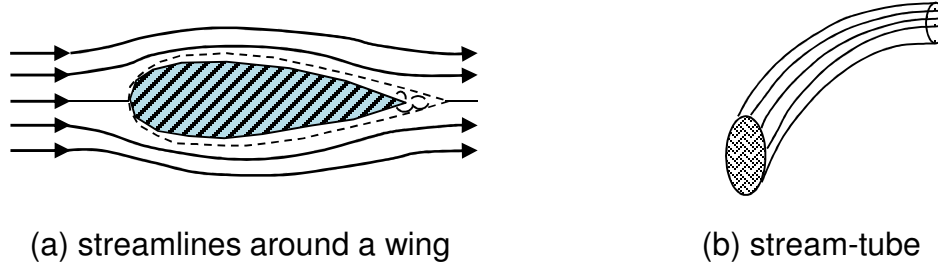


Figure 4 : streamlines and stream-tube

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 16 of 111
		Rev: 01
		Oct 2014

The Laws of Thermodynamics

The First Law of Thermodynamics

This is a law of energy conservation. It states that energy is always conserved, it cannot be created or destroyed. In essence, energy can be converted from one form into another^[9]. The increase in internal energy of a closed system can be defined as follows.

$$Q - W = \Delta U \qquad \text{Eq (1)}$$

Where,

- Q = heat transfer, Btu (kJ)
- W = work transfer, Btu (kJ)
- ΔU = increase in internal energy, Btu (kJ)

For a thermodynamic cycle of a closed system, which returns to its original state, the heat Q_{in} supplied to a closed system in one stage of the cycle, minus that Q_{out} removed from it in another stage of the cycle, equals the net work done by the system. Work done by a system is considered positive; $W > 0$. Work done on a system is considered negative; $W < 0$.

The Second Law of Thermodynamics

It might be thought that the first law of thermodynamics permits all the heat transfer to a cycle to be returned as work transfer, but unfortunately the second law places restraints on the achievement of this desirable situation. It states that in all energy exchanges, if no energy enters or leaves the system, the potential energy of the state will always be less than that of the initial state. This is also commonly referred to as entropy. Entropy is a measure of disorder^[13].

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 17 of 111
		Rev: 01
		Oct 2014

DEFINITION

Angular displacement - a particle moves on a circular path its angle of rotation (or its angular displacement) θ , varies with time.

Boundary layer - thin layer of fluid adjacent to a surface where viscous effects are important; viscous effects are negligible outside the boundary layer.

Buoyancy - is based on Archimedes' principle, which states that the buoyant force exerted on a submerged body is equal to the weight of the displaced fluid.

Center of gravity - the point through which the whole weight of a body may be assumed to act.

Couple - pair of two equal and opposite forces acting on a body in a such a way that the lines of action of the two forces are not in the same straight line.

Drag coefficient - force in the flow direction exerted on an object by the fluid flowing around it, divided by dynamic pressure and area.

Energy - the capacity of a body to do work by reason of its motion or configuration.

Entropy - a measure of the disorder of any system, or of the unavailability of its heat energy for work.

Force - the action of one body on another which will cause acceleration of the second body unless acted on by an equal and opposite action counteracting the effect of the first body.

Friction - the resistance that is encountered when two solid surfaces slide or tend to slide over each other.

Impulse - the product of the force and the time that force acts

Inertia - property of matter which causes a resistance to any change in the motion of a body.

Isentropic - one condition for which there is no heat transfer in reversible between the system and surroundings, therefore this process is also adiabatic.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Page 18 of 111
		Rev: 01
		Oct 2014

Lift coefficient - force perpendicular to the flow direction exerted on an object by the fluid flowing around it, divided by dynamic pressure and area.

Linear momentum - the product of mass and the linear velocity of a particle and is a vector.

Metacenter - the point at which the line of action of the buoyancy force cuts the vertical center line of the floating body in the displaced position.

Moment of the force - the turning effect of a force on a body.

Polar moment of inertia - the sum of the moments of inertia about any two axes at right angles to each other in the plane of the area and intersecting at the pole.

Potential energy - the energy possessed by an element of fluid due to its elevation above a reference datum.

Rigid body - one in which the particles are rigidly connected that does not deform, or change shape.

Resonance - characteristic through increasing amplitude to infinity. The resonance phenomenon appears when the frequency of perturbation or forced angular frequency, p is equal to the natural angular frequency ω .

Steady uniform flow - conditions do not change with position in the stream or with time.

Streamline - a line which gives the direction of the velocity of a fluid particle at each point in the flow stream.

Separation - phenomenon that occurs when fluid layers adjacent to a solid surface are brought to rest and boundary layers depart from the surface contour, forming a low pressure wake region. Separation can occur only in an adverse pressure gradient.

Transition - change from laminar to turbulent flow within the boundary layer.

Vector - a directed line segment that has both magnitude and direction.

Viscosity - a measure of the resistance fluids to flow and may be considered as internal friction.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 19 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

NOMENCLATURE

A	sectional area, ft ² (m ²)
<i>a</i>	total angular acceleration, rad/s ²
c	actual damping coefficient, N.s/m
<i>c</i> _{cr}	critical damping coefficient, N.s/m
<i>C</i> _D	drag coefficient, dimensionless
<i>C</i> _v	constant volume heat capacity, Btu/lbmol.°F (J/mol.K)
d	distance, ft (m)
dv	velocity differential, ft/s (m/s)
dy	distance differential, ft (m)
f	frequency, Hertz (rad/s)
F	force, lbf (N)
<i>F</i> _B	buoyant force, lbf (N)
<i>F</i> _D	drag force, lbf (N)
<i>F</i> _H	normal force on the vertical projection, lbf (N)
<i>F</i> ₀	amplitude of the forced vibration, dimensionless
<i>F</i> _V	weight of fluid above the curve, lbf (N)
g	acceleration gravitational, 32.2 ft/s ² (9.81 m/s ²)
h	height above the ground, ft (m)
H	head, ft (m)
<i>H</i> ₁	enthalpy at point 1, btu/lb (J/kg)
<i>H</i> ₂	enthalpy at point 2, btu/lb (J/kg)
<i>h</i> _A	head added, ft (m)
<i>h</i> _L	head loss, ft (m)
<i>h</i> _E	head extracted, ft (m)
<i>H</i> _O	angular momentum about O, (kg.m ² /s)
I	moment of inertia, lbm.ft ² (kg.m ²)
k	radii of gyration, ft (m)
k	spring stiffness, N/m
KE	kinetic energy, J (N.m)
m	mass, lb (kg)
M	moment, lbf.ft (Nm)
<i>MF</i> _{<i>i</i>}	mole fraction of component <i>i</i>
<i>MW</i> _{<i>i</i>}	molecular weight of component <i>i</i> , lb/ft ³ (kg/m ³)
P	power, HP (watt)
PE	potential energy, J (N.m)
Q	energy added, Btu/lb (J/kg)
r	radius of circular path, ft (m)
R	gas law constant, 10.731 ft ³ .lbf/in ² .lbmol °R (8314.34 kg.m ² /s ² .kgmol.K)

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 20 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

s	space or displacement, ft (m)
S	entropy, btu/lbm.°F (kJ/kg.K)
T	period, sec/cycle
T	temperature, °R (K)
U	internal energy, btu (J)
v	angular velocity, rad/s
v	velocity, ft/s (m/s)
V	volume, ft ³ (m ³)
W	weight, lbf (N)
W	work, J (N.m)
Ws	net mechanical work, Btu/lb (J/kg)
z	elevation or depth, ft (m)

Greek letters

•	
m	mass flow rate, lbm/s (kg/s)
α	angle of inclination, degree
α	angular acceleration, rad/sec ²
α	kinetic energy velocity correction factor
a_n	normal acceleration, rad/s ²
a_t	tangential acceleration, rad/s ²
β	momentum velocity correction factor
ε	absolute roughness, in (mm)
ΣF	total of force, lbf (N)
ΣF	frictional losses, Btu/lb (J/kg)
δ	polytropic index
θ	angular displacement, rad
ω	angular velocity, rad/s
ω_d	damped natural frequency, Hz (rad/s)
ζ	damping factor, ratio c/c_{cr}
ρ	radius of curvature of the path, ft (m)
τ	shear force, lb/ft.s ² (N/m ²)
μ	viscosity, lbf.s/ft ² or poise (N.s/m ²)
μ_m	gas mixture viscosity, micropoise (N.s/m ²)
ν	kinematic viscosity, ft ² /s or stoke (m ² /s)
γ	specific weight, lbf/ft ³ (N/m ³)
γ	specific heat ratio, Cp/Cv

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 21 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

THEORY

A. Solid Mechanics

I. Fundamental of Solid Mechanic Statics

Vectors

A fundamental that should be mastered in statics of a rigid body is the vector. Two kinds of quantities are used in engineering mechanics. A scalar quantity has only magnitude (mass, time, temperature, etc.). A vector quantity has magnitude and direction (force, velocity, etc.). Vectors are represented here by arrows and are used in analysis according to universally applicable rules that facilitate calculations in a variety of problems^[10].

Characteristics of Vector

a. Vector Addition

Any number of concurrent vectors may be summed, mathematically or graphically, and in any order. The vectors F_1 and F_2 add according to the parallelogram law: $F_1 + F_2$ is equal to the diagonal of a parallelogram formed by the graphical representation of the vectors as shown in figure 5(a). The vectors also can be added by moving them successively to parallel positions so that the head of one vector connects to the tail of the next vector as shown in figure 5(b).

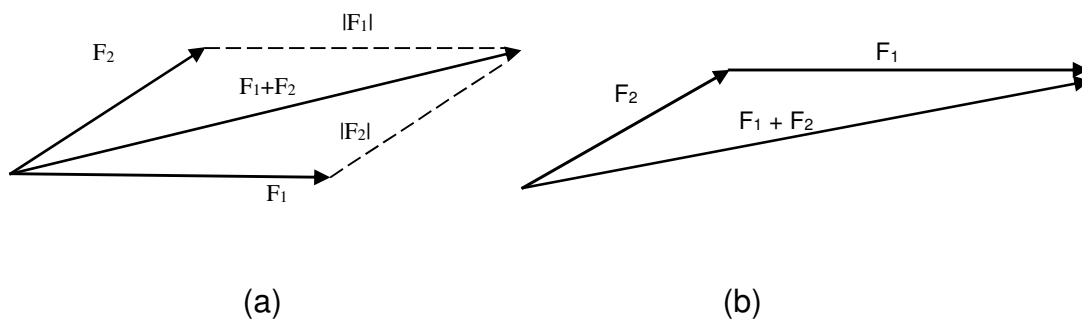


Figure 5: vectors addition

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 22 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

b. Resolution of Vectors and Components

A resultant force may be resolved into two forces at right angles to another. The resultant shown is at angle θ to x axis as follow.

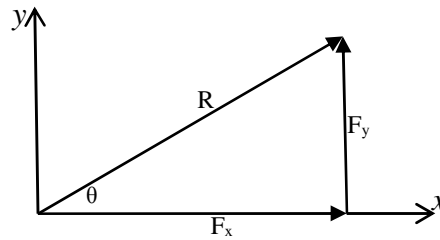


Figure 6: Triangle of forces

There are components and resultant which can be defined as follow.

$$F_x = R \cos \theta \quad \text{Eq (2)}$$

$$F_y = R \sin \theta \quad \text{Eq (3)}$$

Therefore, the angle and resultant can be obtained by the components as below:

$$\theta = \tan^{-1} \left(\frac{F_y}{F_x} \right) \quad \text{Eq (4)}$$

$$R = \sqrt{F_x^2 + F_y^2} \quad \text{Eq (5)}$$

c. Scalar Product of Two Vectors

The scalar (dot) product of two concurrent vectors A and B is defined by

$$a \cdot b = b \cdot a = |a||b| \cos \theta \quad \text{Eq (6)}$$

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 23 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

where A and B are the magnitudes of the vectors, they are defined as follow.

$$A \cdot B = B \cdot A = A_x B_x + A_y B_y + A_z B_z \quad \text{Eq (7)}$$

$$\theta = \arccos \frac{A_x B_x + A_y B_y + A_z B_z}{AB} \quad \text{Eq (8)}$$

For the scalar triple product, this scalar product is used in calculating moments. A, B, C can be expressed in the following determinant form:

$$A \cdot (B \times C) = \begin{vmatrix} A_x & A_y & A_z \\ B_x & B_y & B_z \\ C_x & C_y & C_z \end{vmatrix} = A_x (B_y C_z - B_z C_y) + A_y (B_z C_x - B_x C_z) + A_z (B_x C_y - B_y C_x) \quad \text{Eq (9)}$$

d. Vector Product of Two Vectors

A powerful method of vector mechanics is available for solving complex problems, such as the moment of a force in three dimensions. The vector (cross) product of a vector A and a vector B is defined as $A \times B$ that should be perpendicular to the plane of vectors A and B. There are several rules :

The sense of the unit vector n that appears in the definition of $A \times B$ depends on the order of the factors A and B in such a way that

$$A \times B = - (B \times A) \quad \text{Eq (10)}$$

The magnitude of $a \times b$ is given by

$$|A \times B| = |A||B|\sin \theta \quad \text{Eq (11)}$$

A set of mutually perpendicular unit coordinate vectors i, j, k is called right-handed when $i \times j = k$ and left-handed when $i \times j = -k$.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 24 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

The vector product is calculated using a determinant form as follows.

$$A \times B = \begin{vmatrix} i & j & k \\ A_x & A_y & A_z \\ B_x & B_y & B_z \end{vmatrix} = A_y B_z i + A_z B_x j + A_x B_y k - A_y B_x k - A_x B_z j - A_z B_y i \quad \text{Eq (12)}$$

For three vectors, the vector triple product of three vectors A, B, C is the vector $A \times (B \times C)$ as defined by

$$A \times (B \times C) = A \cdot CB - A \cdot BC \quad \text{Eq (13)}$$

Statics of Rigid Bodies

All solid materials deform when forces are applied to them, but often it is reasonable to model components and structures as rigid bodies, at least in the early part of the analysis. The forces on a rigid body are generally not concurrent at the center of mass of the body, which cannot be modeled as a particle if the force system tends to cause a rotation of the body. Resultant of forces acting on a body can be considered by number of forces, which can be described as follow.

a. Resultant of Forces Acting on a Body at the Same Point

The resultant R of two forces F_1 and F_2 applied to a rigid body at the same point is represented in magnitude and direction by the diagonal of the parallelogram formed by F_1 and F_2 . It can be illustrated in figure 7.

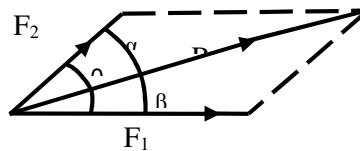


Figure 7: resultant of two forces

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 25 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

The resultant and degrees between the result are defined by

$$R = \sqrt{F_1^2 + F_2^2 + 2F_1F_2 \cos \theta} \quad \text{Eq (14)}$$

And,

$$\sin \alpha = (F_1 \sin \theta) / R \quad \text{Eq (15)}$$

$$\sin \beta = (F_2 \sin \theta) / R \quad \text{Eq (16)}$$

b. Lami's Theorem

If three coplanar forces acting on a point in a body keep it in equilibrium, then each force is proportional to the sine of the angle between the other two forces. There are three forces P, Q and R acting at a point O which between each of two forces has angle as shown as follow^[1].




Figure 8 : Lami's theorem

These forces are in equilibrium then according to Lami's theorem that is given as follow.

$$\frac{P}{\sin \alpha} = \frac{Q}{\sin \beta} = \frac{R}{\sin \gamma} \quad \text{Eq (17)}$$

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 26 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

c. Resultant of Any Number of Forces Applied to a Rigid Body at the Same Point

The three-dimensional components and associated quantities of a vector R as shown in figure 9. The unit vector n is collinear with R . A unit vector is a vector with the magnitude equal to 1 of sum of unit coordinate vectors and a defined direction^[10].

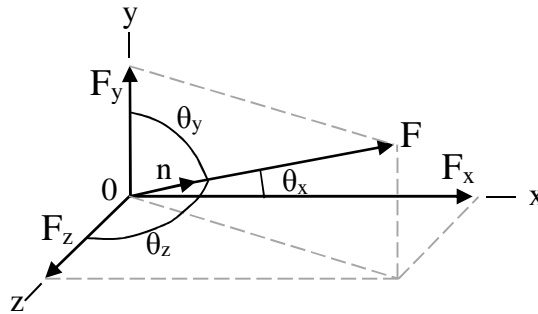


Figure 9 : Three-dimensional components of a vector R

The vector R is written in terms of its scalar components and the unit coordinate vectors as follow.

$$R = F_x i + F_y j + F_z k = Rn \tag{Eq (18)}$$

Where, each of components is defined as below.

$$F_x = R \cos \theta_x \tag{Eq (19)}$$

$$F_y = R \cos \theta_y \tag{Eq (20)}$$

$$F_z = R \cos \theta_z \tag{Eq (21)}$$

And, resultant can be obtained by

$$R = \sqrt{F_x^2 + F_y^2 + F_z^2} \tag{Eq (22)}$$

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 27 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

However, the method is to find unit vector, n on the line of points $A(x_1, y_1, z_1)$ and $B(x_2, y_2, z_2)$ can be obtained by

$$n = \frac{\text{vector } A \text{ to } B}{\text{distance } A \text{ to } B} = \frac{d_x i + d_y j + d_z k}{\sqrt{d_x^2 + d_y^2 + d_z^2}} \quad \text{Eq (23)}$$

Where,

$$dx = x_2 - x_1$$

$$dy = y_2 - y_1$$

$$dz = z_2 - z_1$$

d. Moment of The Force

Moment of the force, or torque is the turning effect of a force on a body. Moment of force can be considered with respect to a point and straight line that is described as follow.

i. The Moment of a Force with Respect to a Point

The tendency of a force to make a rigid body rotate is measured by the moment of that force about an axis. The moment of a force F about an axis through a point O is defined as the product of the magnitude of F times the perpendicular distance d from the line of action of F and the axis O . It is shown in figure 10.

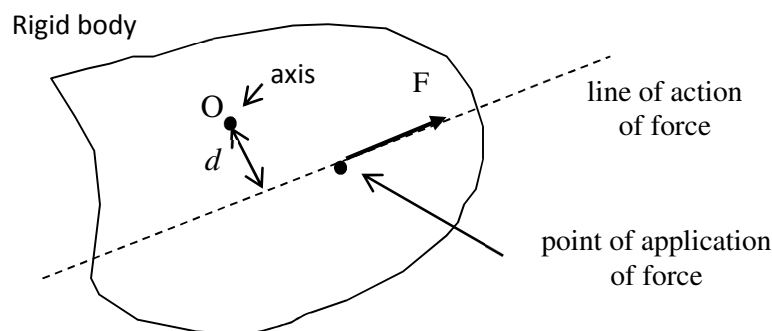


Figure 10 : moment of the force

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 28 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

The equation of this case is defined as a scalar quantity as follow.

$$M_o = F.d \quad \text{Eq (24)}$$

Where,

- M_o = moment about O, lbf.ft (Nm)
- F = force, lbf (N)
- d = distance, ft (m)

Clockwise moment is reckoned positive and counterclockwise moments negative^[7]. When the line of action of a force passes through the axis, the moment is zero, $M_o = 0$ and the system is in equilibrium. Two forces of equal magnitude and acting along the same line of action have not only the same components F_x , F_y , but have equal moments about any axis. They are called equivalent forces since they have the same effect on a rigid body.

Moment of force also may be considered by vector quantity. The moment of a bound vector, v about a point A may be illustrated in figure 11^[8].

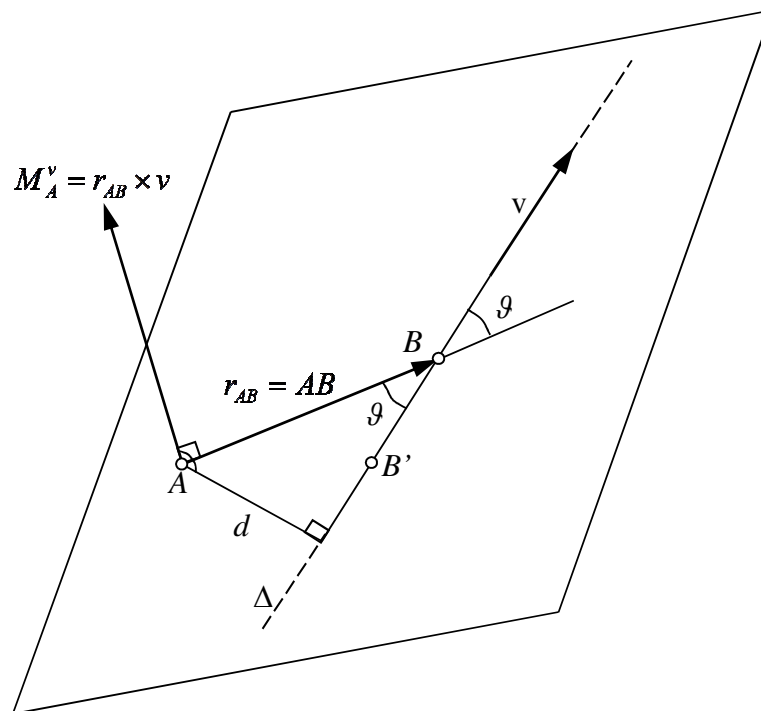


Figure 11 : moment of a bound vector about a point

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 29 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

The vector definition of the moment of this case can be given by

$$M_A^v = AB \times v = r_{AB} \times v \quad \text{Eq (25)}$$

Where,

r_{AB} = position vector from point A to any point on the line of action of B.

The magnitude of the moment, M_A^v is defined by

$$|M_A^v| = M_A^v = |r_{AB}| |v| \sin \theta \quad \text{Eq (26)}$$

$$|M_A^v| = M_A^v = d |v| \quad \text{Eq (27)}$$

ii. The Moment of a Force with Respect to a Line

If the force is resolved into components parallel and perpendicular to the given line, the moment of the force with respect to the line is the product of the magnitude of the perpendicular component and the distance from its line of action to the given line. It is common that a body rotates about an axis. In that case the moment of a force about the line is usefully expressed as

$$M_l = n \cdot M_o = n \cdot (r \times F) = \begin{vmatrix} n_x & n_y & n_z \\ r_x & r_y & r_z \\ F_x & F_y & F_z \end{vmatrix} \quad \text{Eq (28)}$$

Where,

n = a unit vector along the line

r = position vector from point O on line to a point on the line of action of F

M_l = projection of M_o on line

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 30 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

e. Couple

A moment is called a couple when two equal in magnitude and opposite forces have parallel lines of action a distance a apart. This is independent of d and the resultant force is zero. The only motion that a couple can impart is a rotation. In addition, the couple has no tendency to translate a rigid body. The moment about any point O at distance d from one of the lines of action is expressed as Eq (29)^[7].

$$M = Fd - F(d - a) = Fa \quad \text{Eq (29)}$$

The moment of a couple about a point is called the torque of the couple, M or T . The moment of the resultant force about any point on the line of action of the given single force must be of the same sense as that of the couple, positive if the moment of the couple is positive conversely. A couple can be illustrated in following figure.

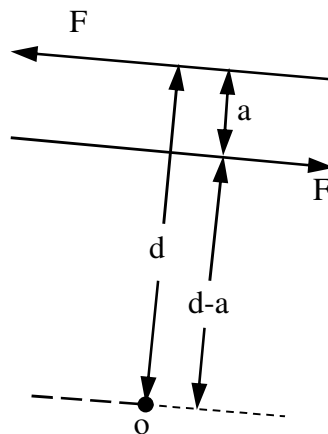


Figure 12 : A couple

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions	Kolmetz Handbook of Process Equipment Design	Page 31 of 111
	SOLID AND FLUID MECHANICS (ENGINEERING FUNDAMENTALS)	Rev: 01
		Oct 2014

f. Equilibrium of Rigid Bodies

A body is in equilibrium when it is stationary or in steady translation relative to an inertial reference frame. In fact, the concept of equilibrium is used for determining unknown forces and moments of forces that act on or within a rigid body or system of rigid bodies. A rigid body is in static equilibrium when the equivalent force-couple system of the external forces acting on it is zero. If the sum of the forces acting on a body is zero and the sum of the moments about one point is zero, then the sum of the moments about every point is zero. In vector notation, this condition is expressed as^[8]

$$\sum F = 0 \quad \text{Eq (30)}$$

$$\sum M_O = \sum (r \times F) = 0 \quad \text{Eq (31)}$$

In terms of rectangular scalar components, equilibrium can be expressed as

$$\sum F_x = 0 \quad \sum M_x = 0 \quad \text{Eq (31)}$$

$$\sum F_y = 0 \quad \sum M_y = 0 \quad \text{Eq (32)}$$

$$\sum F_z = 0 \quad \sum M_z = 0 \quad \text{Eq (33)}$$

The three couples which may be combined by their moment vectors into a single resultant couple having the moment whose moment vector makes angles. The resultant can be calculated as resultant of any number of forces applied to a rigid body at the same point by replacing force, F with moment, M.

g. Support of Rigid Bodies

According to the number of unknown forces existing, the first step in the solution of problems in statics is the determination of the supporting forces which is defined as the external forces in equilibrium acting upon a body. When the forces are all in either the same or different planes and act at a common point, two or three unknown forces may be determined if their lines of action are known, one if unknown. The following data are required for the complete knowledge of supporting forces: magnitude, direction, and point of application.

As example, the beam has a pin support at the left end A and a roller support at the right end B. The beam is loaded by a force F and a moment M at C as shown in figure 13(a) and

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.