


<p>KLM Technology Group</p> <p>Practical Engineering Guidelines for Processing Plant Solutions</p>	<div style="text-align: center;">  <p>Engineering Solutions</p> <p>Consulting, Guidelines and Training</p> <p>www.klmtechgroup.com</p> </div>	<p>Page : 1 of 175</p> <hr/> <p>Rev: 05</p> <hr/> <p>Rev 01 Feb 2007 Rev 02 Feb 2009 Rev 03 May 2012 Rev 04 Mar 2014 Rev 05 July 2021</p>
<p>KLM Technology Group P. O. Box 281 Bandar Johor Bahru, 80000 Johor Bahru, Johor, West Malaysia.</p>	<p style="text-align: center;">Kolmetz Handbook of Process Equipment Design</p> <p style="text-align: center;">PUMP SELECTION, SIZING AND TROUBLESHOOTING (ENGINEERING DESIGN GUIDELINES)</p>	<p>Co Authors</p> <p>Rev 01 - A L Ling Rev 02 - Viska Mulyandasari Rev 03 - K Kolmetz Rev 04 - Reni Mutiara Sari Rev 05 – Faulina Popy P</p> <hr/> <p>Editor / Author</p> <p>Karl Kolmetz</p>

TABLE OF CONTENT

INTRODUCTION

Scope	6
General Design Consideration	7
Type of Pump	7
A. Positive Displacement Pumps	7
a) Reciprocating Pump	7
b) Rotary Pump	8
B. Dynamic Pumps	8
a) Centrifugal Pumps	8
Process Requirements Parameters	12
DEFINITIONS	14
NOMENCLATURE	18

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 2 of 175
		Rev: 05
		July 2021

Greek letters	19
THEORY	20
Working Principle of Pump	20
I. Centrifugal Pump	21
A) Component of Centrifugal Pumps	29
I) Rotating Elements	30
II) Stationary Elements	42
B) Centrifugal Pump Characteristics	63
a) Centrifugal Pump Curve Characteristics	65
b) Specific Speed and Optimal Geometry Performance	68
c) Viscosity Effects	69
d) Suction Specific Speed	70
e) Affinity Laws	70
e) Temperature Rise Due to Pumping	71
C) Working Theory-Conversion of Kinetic Energy to Pressure Energy	72
Efficiency, η curve For Centrifugal Pump	73
Power for Centrifugal Pump	77
NPSH-curve (Net Positive Suction Head) For Centrifugal Pump	78
II. Positive Displacement Pump	78
A) Reciprocating Pumps	79

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 3 of 175
		Rev: 05
		July 2021

a) Pump Calculation	80
Component of Reciprocating Pumps	85
a) Plungers	85
b) Piston	86
c) Stuffing Box	86
d) Pulsation	87
B) Rotary Pumps	89
Pump Selection	90
C) Screw Pumps	97
I. Industry Codes and Standards for Pump Selection & Design	96
Total Head	
Net Positive Suction Head – NPSH	107
Pump Power and Efficiency	108
I) Power	112
II) Pump Efficiency	113
Multiple Pumps Installation	115
Open and Closed System	117
Cavitation	118
Pump Sizing- Step by Step Calculation	120
Troubleshooting of The Pump Problems	122

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 4 of 175
		Rev: 05
		July 2021

Material of Construction	132
APPLICATION	143
Example Case 1: Pump Sizing for water flow	143
Example Case 2: Pump Sizing for Hydrocarbon flow	150
Example Case 3: Pump Sizing for Slurry flow	157
Example Case 4: Brake Horse Power of Pump	164

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 5 of 175
		Rev: 05
		July 2021

List of Figure	Page
Figure 1 : Foot mounted overhung pump	9
Figure 2 : Centerline mounted overhung pump	9
Figure 3 : Radically split multistage-single & double casing	10
Figure 4 : Simple Centrifugal Pump	23
Figure 5 : Seven-stage centrifugal pump.	24
Figure 6 : Radial Pump	25
Figure 7 : Part of Double Section Impeller	26
Figure 8 : Vertical multistage in line pump and Horiz multi stage end-Suction Pump	28
Figure 9 : Component of centrifugal pump	30
Figure 10 : Some types of impellers for centrifugal pumps	31
Figure 11 : Gaps at Impeller	35
Figure 12 : Type of casings	43
Figure 13 : Type of Seal	50
Figure 14 : Sealing Liquid	55
Figure 15 : Wearing	63
Figure 16 : Performance Curve of Centrifugal Pumps	66
Figure 17 : Typical performance curves for a centrifugal pump	67
Figure 18 : Specific speed variations of different types of pump	69
Figure 19 : The Efficiency Curve of a Typical Centrifugal Pump	74
Figure 20 : The NPSH – curve of Typical Centrifugal Pump	78
Figure 21 : Double-acting piston pump	79
Figure 22 : Positive-displacement gear-type rotary pump	90
Figure 23 : Selection guides for various type of pumps	97
Figure 24 : Screw Pump	98
Figure 25 : Centrifugal Pump Efficiency	114
Figure 26 : Pump Installation	116
Figure 27 : Schematic of Closed System	117
Figure 28 : Schematic of Open System	118
Figure 29 : Cavitation Corrosion	120

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 6 of 175
		Rev: 05
		July 2021

	List of Table	Page
Table 1	: Recommended Names of Centrifugal Pump Parts	45
Table 2	: Seal for centrifugal pumps	57
Table 3	: Comparison of packing and mechanical seals	58
Table 4	: Typical speed of rotation for centrifugal pump	69
Table 5	: Affinity Laws	72
Table 6	: Effects of Increased Wearing-ring Clearance on Centrifugal Pump Performance	76
Table 7	: Slip in a Pump with a Plate Valve	84
Table 8	: Slip as a Function of Pump Speed and Pressure	85
Table 9	: The effect of speed on mechanical efficiency at a constant Developed Pressure	85
Table 10	: The effect of Pressure on Mechanical Efficiency at a Constant Speed	86
Table 11	: Guidelines for Acceptable Plunger Speeds	89
Table 12	: General selection methods for centrifugal pumps	92
Table 13	: General selection method for positive displacement pumps	95
Table 14	: Internal axial velocity limits	103
Table 15	: General Centrifugal Pump Problem and Solution	127
Table 16	: Pump Material of Construction for specific services.	134

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 7 of 175
		Rev: 05
		July 2021

INTRODUCTION

Scope

This design guideline assists engineers, maintenance and operations personnel to understand the selection and sizing of pumps. A pump is one of the most important pieces of mechanical equipment that is present in industrial processes. A pump moves liquid from one area to another by increasing the pressure of the liquid above the amount needed to overcome the combined effects of friction, gravity and system operating pressures.

There are two types of pump which are generally used in industrial processes: positive displacement pump and centrifugal. It is important to choose the suitable type of pump based on process requirement and fluid process properties. The functions and types of pump are explained in detail under the General Design Guideline section.

The theory section covers the selection method of the pump based on their application and engineering calculations for the sizing of the pump. When sizing the pump, the understanding of concept of cavitation is very important. Cavitation is an abnormal condition that can result in loss of production, equipment damage and worst of all, personnel injury. To prevent pumps from having this problem, the correct design should be followed by applied the correct theory when carrying out the activities of pump sizing and selection.

In the application section of this guideline, multiple case studies are shown and discussed in detail, highlighting the way to apply the theory for the calculation. Generally used theory, such as Bernoulli's theory, is used as the basic of calculation because it is applicable for various conditions. This theory is applied in calculation of the NPSH of the pumps, which is shown in detail in this section. The case studies will help the engineer do the selection and sizing for the pumps base on their own plant system.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 8 of 175
		Rev: 05
		July 2021

General Design Consideration

Type of Pumps

The selection of type and construction of a pump is very important to meet the process specification and proper application. Knowledge of the variety of pumps in the market should be reviewed and understood.

A. Positive Displacement Pumps

Positive displacement (PD) pumps work by allowing a fluid to flow into some enclosed cavity from a low-pressure source, trapping the fluid, and then forcing it out into a high-pressure receiver by decreasing the volume of the cavity. This is done intermittently in the case of reciprocating pumps and continuously in the case of rotary gear and screw pumps. Some examples of PD pumps are: fuel and oil pumps in most automobiles, the pumps on most hydraulic systems, and the heart of most animals.

Some general types of the positive displacement pumps are as below:

a) Reciprocating Pump

Reciprocating pumps create and displace a volume of liquid, their “displacement volumes”, by action of a reciprocating element. Liquid discharge pressure is limited only by strength of structural parts. A pressure relief valve and a discharge check valve are normally required for reciprocating pumps.

Reciprocating pumps can be further classified into three types of pump as below,

- i) Piston Pumps
- ii) Packed Plunger Pumps
- iii) Diaphragm Pumps

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 9 of 175
		Rev: 05
		July 2021

b) Rotary Pump

Rotary pumps function with close clearances such that a fixed volume of liquid is displaced with each revolution of the internal element. Rotary pumps include:

- i) Gear Pump
- ii) Lobe Pump
- iii) Vane Pump
- iv) Screw Pump

All those pumps above have the similar working principles: pumping the liquid with the help of rotating elements. The difference lies on the rotating elements; they could be gear, lobe, vane, or screw.

B. Dynamic Pumps

Dynamic pumps, in which energy is continuously added to increase the fluid velocities within the machines to values greater than those occurring at the discharge so subsequent velocity reduction within or beyond the pump produces a pressure increase. Major kinds which often used in many industries are centrifugal pumps^[8].

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 10 of 175
		Rev: 05
		July 2021

a) Centrifugal Pumps

Centrifugal pumps are dynamic pumps. A centrifugal pump raises the pressure of the liquid by giving it a high kinetic energy and then converts it into pressure energy before the fluid exits the pump. It normally consists of an impeller (a wheel with blades), and some form of housing with a central inlet and a peripheral outlet. The impeller is mounted on a rotating shaft and enclosed in a stationary casing. Casings are generally of two types: volute and circular. The impeller design and the shape of the casing determine how liquid is accelerated through the pump.

Some general types of the centrifugal pumps are as below:

i) Overhung pump

A pump with the impeller(s) cantilevered from its bearing assemblies is classified as an overhung pump.

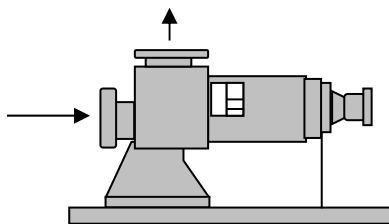


Figure 1: Foot mounted overhung pump




Figure 2: Centerline mounted overhung pump

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

<p>KLM Technology Group</p> <p>Practical Engineering Guidelines for Processing Plant Solutions</p> <p>www.klmtechgroup.com</p>	<p>Kolmetz Handbook of Process Equipment Design</p> <p>PUMP SELECTION, SIZING AND TROUBLESHOOTING</p> <p>ENGINEERING DESIGN GUIDELINES</p>	Page 11 of 175
		Rev: 05
		July 2021

ii) Between bearings pump

A pump with the impeller(s) located between the bearings is classified as a between bearings pump. The pump may be single-stage (one impeller), two-stage, or multistage. It can be axially (horizontally) split or radially split.

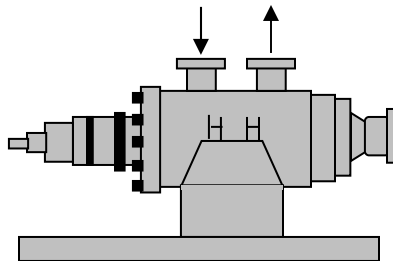


Figure 3: Radically split multistage-single & double casing.

iii) Vertically suspended pump

A pump with the impeller(s) cantilevered vertically and the suction nozzle typically submerged is classified as a vertically suspended pump.

iv) Seal-less pump

Seal-less pumps are special pumps which do not require shaft seals. Construction for seal-less pumps is driven by canned motors or magnetic couplings. It is normally used in process involve extremely hazardous fluid, where leakage cannot be tolerated.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 12 of 175
		Rev: 05
		July 2021

v) Submersible pump

Submersible pumps are designed to prevent pump cavitation. The driver components inside are completely surrounded by the pumped fluid.

vi) Horizontal self-priming pump

Horizontal self-priming pumps are designed to create a vacuum at the pump inlet. This enables the pump to “suck” fluid into its casing. The suction nozzle of the pump can therefore be located above the level of liquid being pumped.

Centrifugal pumps are used in more industrial applications than any other kind of pump. This is primarily because these pumps offer low initial and upkeep costs. Traditionally these pumps have been limited to low-pressure-head applications, but modern pump designs have overcome this problem unless very high pressures are required.⁽⁴⁾ The single-stage, horizontal, overhung, centrifugal pump is by far the most commonly type used in the chemical process industry⁽³⁾.

Basically, pump selection is made on the flow rate and head requirement and with other process considerations, such as material of the construction pumps for the corrosive chemical service or for the fluid with presence solids in the stream.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 13 of 175
		Rev: 05
		July 2021

Process Requirements Parameters

In designing the pump, the knowledge of the effect of parameters; such as pump capacity, NPSH, pumping maximum temperature, specific gravity, fluid viscosity, fluid solid content, and the other process requirements are very important. All of these parameters will affect the selection and design of the pump which will affect the performance of the pump in the process.

Pump capacity is a parameter plays an important role when selecting the pump. Capacity means the flow rate with which liquid is moved or pushed by the pump to the desired point in the process. It is commonly measured in either gallons per minute (gal/min) or cubic meters per hour (m³/hr). The capacity usually changes with the changes in operation of the process. A minimum required flow rate need to be specified, this is important to determining if a minimum flow bypass is required for the selected pump to avoid pump overheating and mechanical damage.

NPSH as a measure to prevent liquid vaporization or called cavitation of pump. Net Positive Suction Head (NPSH) is the total head at the suction flange of the pump less the vapor pressure converted to fluid column height of the liquid. The design engineer should always remember that pumps can pump only liquids, not vapors because when a liquid vaporizes its volume increases greatly. For example: 1ft³ of water it will vaporize to produce 1700ft³ of steam. This will cause the rise in temperature and pressure drop in the fluid and pump will stop functioning because it has not sufficient suction pressure present.

Pumping maximum temperatures is important in deciding pump construction style and pump cooling and mechanical seal requirements. The minimum operating temperature is to ensure that the material has adequate impact strength.

Specific gravity is parameter determines the pump head required to produce a desired pressure increase. For pumps with limited head capability such as centrifugal pumps, it affects pressure rise capability. Pump power requirements are also affected by specific gravity.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 14 of 175
		Rev: 05
		July 2021

Viscosity is important in the selection of pump type and has a significant effect on centrifugal pump performance. Minimum values of viscosity are important in determining rotary pump (positive displacement pump) performance, while maximum viscosity is important in determining debits to centrifugal pump performance.

Fluid solid content will affect the pump design. It affected the aspects of the design for the flow characteristic, consideration design of erosion resistance, flow passage size, impeller style, peripheral speed, design features to disintegrate large particles, and shaft sealing design. This parameter has to be added in the data sheet for design.

Other process requirement such as flexibility for expansion should be consider as well. This is important for future capacity expansion; it helps to minimize the cost of expansion because to replace the pump will be a large sum of money. Working capacity of pump should always be design for more than 20% extra design capacity.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

<p>KLM Technology Group</p> <p>Practical Engineering Guidelines for Processing Plant Solutions</p> <p>www.klmtechgroup.com</p>	<p>Kolmetz Handbook of Process Equipment Design</p> <p>PUMP SELECTION, SIZING AND TROUBLESHOOTING</p> <p>ENGINEERING DESIGN GUIDELINES</p>	Page 15 of 175
		Rev: 05
		July 2021

DEFINITION

Bearing Housing -The bearing housing encloses the bearings mounted on the shaft. The bearings keep the shaft or rotor in correct alignment with the stationary parts under the action of radial and transverse loads. The bearing house also includes an oil reservoir for lubrication, constant level of oil, jacket for cooling by circulating cooling water.

Brake horsepower - is the horsepower including pump efficiency, otherwise called “shaft power”.

Capacity - Is the water handling capability of a pump commonly expressed as either gallon per minute (gal/min) or cubic meter per minute (m³/min).

Cavitation - Is the result of vapor bubbles imploding. This occurs when the amount of fluid flowing into the pump is restricted or blocked.

Coupling- A device for connecting the pump shaft to the driver shaft consisting of the pump shaft hub and driver shaft hub, usually bolted together.

Discharge Port —Point where the discharge hose or pipe is connected to the pump.

Datum Elevation – It use as reference of the horizontal plane for which all the elevations and head are measured. The pumps standards normally specify the datum position relative to a pump part, eg. Centrifugal horizontal pump datum position is at the impeller shaft centerline.

Displacement - The calculated volume displacement of a positive displacement pump with no slip losses.

Dynamic Discharge Head- The static discharge head plus the friction in the discharge line also referred to as Total Discharge Head.

Dynamic Suction Head - The static suction lift plus the friction in the suction line also referred to as Total Suction Head.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

<p>KLM Technology Group</p> <p>Practical Engineering Guidelines for Processing Plant Solutions</p> <p>www.klmtechgroup.com</p>	<p>Kolmetz Handbook of Process Equipment Design</p> <p>PUMP SELECTION, SIZING AND TROUBLESHOOTING</p> <p>ENGINEERING DESIGN GUIDELINES</p>	Page 16 of 175
		Rev: 05
		July 2021

Endurance limit – Is the stress below which the shaft will withstand an infinite number of stress reversals without failure. Since one stress reversal occurs for each revolution of the shaft, this means that ideally the shaft will never fail if the maximum bending stress in the shaft is less than the endurance limit of the shaft material.

Friction Head-The head required to overcome the resistance to flow in the pipe and fittings. It is dependent upon the size, condition and type of pipe, number and type of pipe fittings, flow rate, and nature of the liquid.

Friction Loss - Refers to reductions in flow due to turbulence as water passes through hoses, pipes, fittings and elbows.

Head, Acceleration - The head equivalent to the pressure change due to changes in velocity in the piping system.

Hydraulic horsepower - is the horsepower required for pumping liquid at operating conditions without loss of pump efficiency

Impeller — A disk with multiple vanes. It is attached to the pump engine or motor and is used to create the centrifugal force necessary for moving water through the pump casing.

Mechanical Seal — A common wear part that forms a seal between the pump and the engine or motor. Also prevents liquid from seeping into the engine or motor.

Net Positive Suction Head (NPSHa) - Is the total head at the suction flange of the pump less the vapor pressure converted to fluid column height of the liquid

Net Positive Suction Head Required (NPSHr) - NPSH in meters (feet) determined by Supplier testing, usually with water. NPSHR is measured at the suction flange and corrected to the datum elevation. NPSHR is the minimum NPSH at rated capacity required to prevent a head drop of more than 3% (first stage head in multistage pumps) due to cavitation within pump.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

<p>KLM Technology Group</p> <p>Practical Engineering Guidelines for Processing Plant Solutions</p> <p>www.klmtechgroup.com</p>	<p>Kolmetz Handbook of Process Equipment Design</p> <p>PUMP SELECTION, SIZING AND TROUBLESHOOTING</p> <p>ENGINEERING DESIGN GUIDELINES</p>	Page 17 of 175
		Rev: 05
		July 2021

Pressure Head - Pressure Head must be considered when a pumping system either begins or terminates in a tank which is under some pressure other than atmospheric. The pressure in such a tank must first be converted to feet of liquid. Denoted as h_p , pressure head refers to absolute pressure on the surface of the liquid reservoir supplying the pump suction, converted to feet of head. If the system is open, h_p equals atmospheric pressure head.

Pulsation - The variation of pressure in a line due to the flow variations caused by a piston(s), plunger(s) or diaphragm(s) which are creating a pumping action.

Slip - Leakage flow within a rotary positive displacement pump from the discharge back to the suction caused by the clearances needed between rotating and stationary components.

Suction Specific Speed - An index of pump suction operating characteristics determined at the best efficiency point with the maximum-diameter impeller.

Static Suction Head -Head resulting from elevation of the liquid relative to the pump center line (datum). If the liquid level is above pump centerline (datum), h_s is positive. If the liquid level is below pump centerline (datum), h_s is negative. Negative h_s condition is commonly denoted as a “suction lift” condition

Static Discharge Head - It is the vertical distance in feet between the pump centerline and the point of free discharge or the surface of the liquid in the discharge tank.

Suction Port — Point where the suction hose or pipe is connected to the pump.

Vapor Pressure Head - Vapor pressure is the absolute pressure at which a liquid and its vapor co-exist in equilibrium at a given temperature. The vapor pressure of liquid can be obtained from vapor pressure tables. When the vapor pressure is converted to head, it is referred to as vapor pressure head, h_{vp} . The value of h_{vp} of a liquid increases with the rising temperature and in effect, opposes the pressure on the liquid surface, the positive force that tends to cause liquid flow into the pump suction i.e. it

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 18 of 175
		Rev: 05
		July 2021

reduces the suction pressure head. (Vapor pressure can be said as the external pressure require to prevent fluid from evaporate become vapor).

Velocity Head - Refers to the energy of a liquid as a result of its motion at some velocity 'v'. It is the equivalent head in feet through which the water would have to fall to acquire the same velocity, or in other words, the head necessary to accelerate the water. The velocity head is usually insignificant and can be ignored in most high head systems. However, it can be a large factor and must be considered in low head systems.

Viscosity — is a mechanist of fluid resistance to flow of a liquid at a given temperature. High viscosity liquids such as motor oil are more resistant to flow than water.

$$\text{Kinematics Viscosity (cSt)} = \frac{\text{Absolute Viscosity (cP)}}{\text{Specific Gravity}}$$

Volumetric efficiency - The ratio of real flow rate to theoretical flow rate (pump displacement)

Volute — A stationary housing inside the pump housing in which the impeller rotates. It is used to separate air and water.

Total Head - Pressure required in feet (meter) of head that the pump must produce. The head at the discharge pump flange minus the head at suction flange.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 19 of 175
		Rev: 05
		July 2021

NOMENCLATURE

A	Cross-sectional area of plunger or piston, in ²
A	Cross-sectional area of piston rod, in ²
C	Constant for pump geometry
C _p	Specific heat of pumped liquid, Btu/lb.°F
D	Diameter of impeller, in
D	Displacement of reciprocating pump, gpm
E	Pump efficiency, fraction
g	Acceleration due to gravity, 32.2 ft/s ² (9.81 m/s ²)
H _c	Total head developed from centrifugal pump, ft
H _d	Discharge head, ft (m)
H _s	Suction head, ft (m)
H _t	Total head, ft (m)
h _a	Acceleration for the reciprocating pump only for calculate the head losses due to pulsation in the flow, ft (m)
h _f	Head produce from pressure loss in pipe, fitting, and entrancement, ft (m)
h _{f(d)}	Head produce from pressure loss in pipe, fitting, and entrancement with depend the pipe diameter and type of flow from discharge to destination, ft (m)
h _{f(s)}	Head produce from pressure loss in pipe, fitting, and entrancement with depend the pipe diameter and type of flow at suction section, ft (m)
h _p	Absolute pressure head on surface of liquid, ft (m)
h _{p(d)}	Gauge pressure head on surface of liquid at destination, ft (m)
h _{p(s)}	Gauge pressure head on surface of liquid at suction point, ft (m)
h _{st}	Head from the elevation between distance from suction surface to pump centerline, ft (m)
h _{st(d)}	Head from the elevation between distance from destination surface to pump centerline, ft (m)
h _{st(s)}	Head from the elevation between distance from suction surface to pump centerline, ft (m)
h _{vp}	Vapor pressure of the liquid converted, ft (m)
K	A factor representing the relative compressibility of the liquid

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 20 of 175
		Rev: 05
		July 2021

L	Length of the suction line from the nearest upstream vessel (or suction stabilizer) to the pump, (ft or m)
M	The number of cylinders
n	Speed of rotation, RPM (Revolutions per minute)
N	Pumps speed for centrifugal pumps, rpm
Ns	Specific speed, dimensionless
P	Pressure in system, psi (kg/cm ²)
Q	Capacity, gal/min (m ³ /min)
Q ₁	Capacity, (m ³ /s)
r	Radius of shaft (rad)
Sp	Pump speed for reciprocating pump, ft/min
S _{ss}	Suction specific speed, dimensionless
S	Specific gravity
S	Stroke length, in
T _r	Shaft Torque (Nm)
V	Average velocity in the suction line, ft/s (m/s)
v	Velocity of periphery of impeller (tip speed), ft/s (m/s)
VE	Volumetric efficiency, dimensionless

Greek letters

η_p	Pump efficiency, %
ρ	Fluid density, lb/ft ³ (kg/m ³)
π	pi (3.142)
ω	Shaft angular velocity (rad/s)

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 21 of 175
		Rev: 05
		July 2021

REFERENCES

1. "Flow of Fluids through Valves, Fittings and Pipe," by the Crane Co., Chicago, Technical Paper No. 410, 1988.
2. "Fluid Mechanics for Chemical Engineers", Noel de Nevers, McGraw-Hill, Inc. 1991.
3. "Coulson & Richardson's Chemical Engineering Volume 6", by R.K. Sinnott, Third Edition 1999.
4. "Pumps and Fans", Robert F. Boehm. The Engineering Handbook by Ed. Richard C. Dorf, Boca Raton: CRC Press LLC, Section 39, 2000.
5. "Centrifugal and Axial-Flow Pumps," Karassik, I. J., in "Marks' Standard Handbook for Mechanical Engineers," E. A. Avallone and T. Baumeister, eds., McGraw-Hill, New York (1999).
6. "Alfa Laval Pump Handbook", by Alfa Laval Company, First Edition, 2001.
7. "Rules of Thumb for Chemical Engineer", by Carl Branan, Gulf Publishing Company, Second Edition, 1995.
8. "Pump Handbook", By Grundfos Management A/S, 2004.
9. "Pump Handbook", Igor J. Karassik, Joseph P. Messina, Paul Cooper, & Charles C. Heald, McGraw-Hill Inc., New York, Third Edition, 2001.
10. "Transport and Storage of Fluids", Meherwan P. Boyce, Perry's Chemical Engineering Handbook, 7th Ed., Section 10, 1997.
11. "Transport and Storage of Fluids", Raymond P. Genereaux, Perry's Chemical Engineering Handbook, 6th Ed., Section 10, 1997.
12. "Pump Selection Handbook", MULTIQIP INC., 2003.

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

KLM Technology Group Practical Engineering Guidelines for Processing Plant Solutions www.klmtechgroup.com	Kolmetz Handbook of Process Equipment Design PUMP SELECTION, SIZING AND TROUBLESHOOTING ENGINEERING DESIGN GUIDELINES	Page 22 of 175
		Rev: 05
		July 2021

13. "Understand the Basics of Centrifugal Pump Operation", Kimberly Fernandez, www.cepmagazine.org , May 2002.
14. "Transport Processes and Separation Process Principles", 4th Ed., C.J. Geankoplis, Pearson Education, Inc., New Jersey, 2003
15. "Reciprocating Pumps", FMC Technologies, Inc., Houston, Texas, 2006
16. "Measurement of the characteristics of a centrifugal pump" Practical course Turbomachinery, F.-K. Benra, University Duisburg-Essen.
17. "Centrifugal Pumps", <http://www.kiwipumps.net/centrifugal-pumps2.html>.
18. K Kolmetz et al, Kolmetz Handbook of Process Equipment Design, Piping Fluid Flow Hydraulics Line Sizing and Selection, Engineering Design Guidelines, 2018
19. K Kolmetz et al, Kolmetz Handbook of Process Equipment Design, Safety in Process Equipment Design, Engineering Design Guidelines, 2014
20. K Kolmetz et al, Kolmetz Handbook of Process Equipment Design, Piping Fluid Flow Hydraulic Surge, Engineering Design Guidelines, 2014

These design guideline are believed to be as accurate as possible, but are very general and not for specific design cases. They were designed for engineers to do preliminary designs and process specification sheets. The final design must always be guaranteed for the service selected by the manufacturing vendor, but these guidelines will greatly reduce the amount of up front engineering hours that are required to develop the final design. The guidelines are a training tool for young engineers or a resource for engineers with experience.

This document is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.